



Cooled vacuum oven m360 VO49cool

Innovative Vacuum Drying for
Temperature-Sensitive Materials

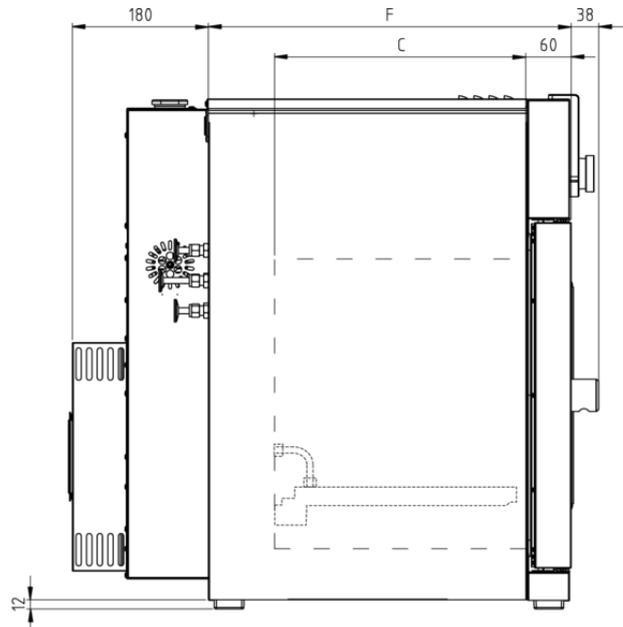

On this page, you can find all the essential technical data on the m360 cooled vacuum oven VOcool. Our customer relations team will be pleased to help if you want further information. Please contact our technical specialists at m360@memmert.com.

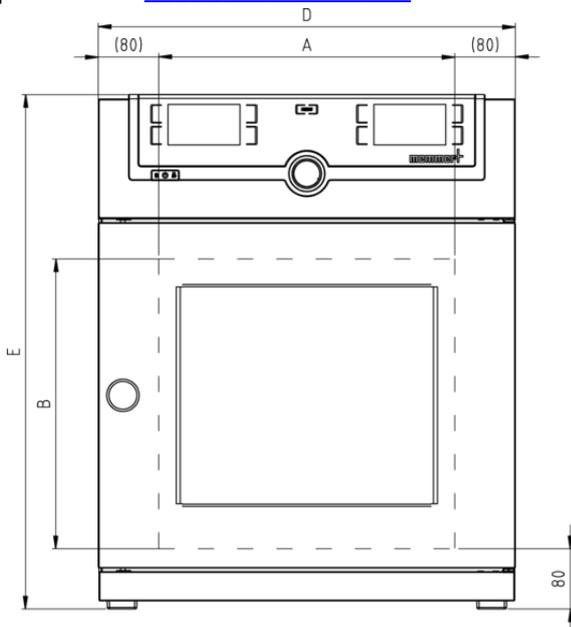

Temperature

Working temperature range from 5°C (at least 20 below ambient temperature) to +90°C

Setting accuracy temperature up to 99.9 °C: 0.1 / from 100 °C: 0.5

Temperature sensor temperature measured through 4-wire Pt100 sensor individually for each thermoshelf

Setting temperature range from +5°C up to +90°C

resolution of display for actual values 0.1°C

resolution of display for setpoint values 0,1°C

Pressure (Vacuum)

Vacuum range 5 to 1100 mbar

Pressure control Digital electronic pressure control for a speed-controlled vacuum pump. Tubing for vacuum, air and inert gas are made of material 1.4571 (ASTM 316 Ti). Programmable, digitally controlled inlet for air.

Permitted final vacuum 0.01 mbar

Maximum leakage rate 0.01 bar/h

Pump control speed control, optimised rinsing procedures for the pump membranes as well as signal output for pump ON/OFF

Connection Vacuum connection with small flange DN16, and gas inlet with fresh air supply

Control technology

Calibrate Three freely selectable temperature values and three freely selectable pressure values

adjustable parameters temperature (Celsius or Fahrenheit), pressure (vacuum), programme time, time zones, summertime/wintertime

Language setting German, English, Spanish, French, Polish, Czech, Hungarian, Italian, Chinese

ControlCOCKPIT TwinDISPLAY. Adaptive multifunctional digital PID-microprocessor controller with 2 high-definition TFT-colour displays.

Timer Digital backwards counter with target time setting, adjustable from 1 minute to 99 days

Function SetpointWAIT the process time does not start until the set temperature is reached

Communication

Documentation programme stored in case of power failure

Programming AtmoCONTROL software on a USB stick for programming, managing and transferring programmes via Ethernet interface or USB port

Safety

Temperature control	mechanical temperature limiter TB, protection class 1 according to DIN 12880 to switch off the heating approx. 10°C above nominal temperature
AutoSAFETY	additionally integrated over- and undertemperature protection "ASF", automatically following the setpoint value at a preset tolerance range, alarm in case of over- or undertemperature, heating is switched off in case of overtemperature, compressor in case of undertemperature
Autodiagnostic system	integral fault diagnostics for temperature control
Alarm	visual and acoustic

Heating concept

Heating Concept	Connection for a thermoshelf in the rear panel
VO cooling	Peltier cooling unit ensures a surface temperature distribution with a maximum deviation of ± 1 K across the entire temperature range

Standard equipment

Number of slide-in units	1
Works calibration certificate	for +10°C/20 mbar
Door	full-sight glass door, inside spring-loaded, 15 mm thick glazed panel in safety glass, outside with anti-splitter screen
Internals	Cooling- and heating-combination of aluminium, material 3.3547 (ASTM B209), with integrated cooling circuit as well as large-area heating including local temperature sensing (Pt100, 4-wire-circuit); individual overtemperature protection. Further data see stainless steel interior.

Stainless steel interior

Material	Hermetically welded stainless steel interior of extremely corrosion-resistant stainless steel, material 1.4404
Volume	49 l
Dimensions	$w_{(A)} \times h_{(B)} \times d_{(C)}$: 385 x 385 x 330 mm
Max. number of internals	1
Max. loading of chamber	60 kg
Max. loading per internal	20 kg

Textured stainless steel casing

Installation	4 adjustable appliance feet
Dimensions	$w_{(D)} \times h_{(E)} \times d_{(F)}$: 550 x 687 x 480 mm (d +38mm door handle)

Electrical data

Voltage	230 V, 50/60 Hz
Electrical load	approx. 600 W

Ambient conditions

Altitude of installation	max. 2,000 m above sea level
---------------------------------	------------------------------

Ambient temperature	+5 °C to +40 °C
----------------------------	-----------------

Set Up	The distance between the wall and the rear of the chamber must be at least 15 cm. The clearance from the ceiling must not be less than 20 cm and the side clearance from the wall must not be less than 8 cm.
---------------	---

Humidity rh	max. 80 %, non-condensing
--------------------	---------------------------

Overvoltage category	II
-----------------------------	----

Pollution degree	2
-------------------------	---

Packing/shipping data

Transport information	The appliances must be transported upright
------------------------------	--

Customs tariff number	8419 8998
------------------------------	-----------

Country of origin	Federal Republic of Germany
--------------------------	-----------------------------

WEEE-Reg.-No.	DE 66812464
----------------------	-------------

Dimensions approx incl. carton	w x h x d: 660 x 870 x 590 mm
---------------------------------------	-------------------------------

Net weight	approx. 95 kg
-------------------	---------------

Gross weight carton	approx. 116 kg
----------------------------	----------------

Standard units are safety-approved and bear the test marks