


DECISION AID FOR PRODUCTS WITH HUMIDITY CONTROL

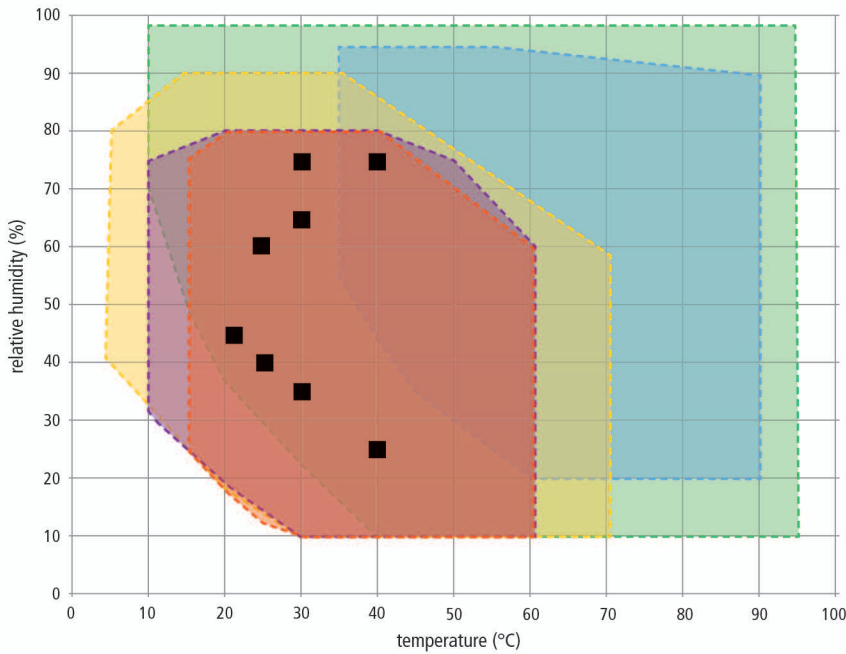

Explanation of diagram:

Within the respective temperature-humidity range, condensation-free permanent operation is possible.

To which extent condensation may occur in the threshold range depends on the humidity content of the chamber load and the ambient conditions.

- ICHeco/ICH
- HPP110eco-HPP1060eco
- HPP1400eco/2200eco
- HCP
- CTC
- Climate testing points according to ICH guidelines

Model selection

Model size in litres (= dm ³)	ICHeco/ICH	HPPeco	HPPeco	HCP	CTC
56				HCP50	
107				HCP105	
108	ICH110eco/ICH110	HPP110eco			
156				HCP150	
241				HCP240	
256	ICH260eco/ICH260	HPP260eco			CTC256
384		HPP410eco			
749	ICH750eco/ICH750	HPP750eco			
1060		HPP1060eco			
1360			HPP1400eco		
2140			HPP2200eco		
Temp. with hum.	+10 to +60 °C	5 ² to +70 °C	15 ³ to +60 °C	7 ¹ to +90 °C	+10 to +95 °C
Temp. w/o hum.	-10 to +60 °C	0 ² to +70 °C	0 ² to +70 °C	7 ¹ to +90 °C	-42 to +190 °C
Humidity range	10 to 80 % rh	10 to 90 % rh	10 to 80 % rh	20 to 95 % rh	10 to 98 % rh
Ambient conditions	+19 to +25 °C, max 50 % rh according to Memmert works standard				

¹ above ambient temperature

² at least 20 °C below ambient temperature

³ at least 10 °C below ambient temperature

Important notes concerning working ranges

If the temperature-humidity values exceed the specific limits (working range), the superheated steam introduced will immediately condense at the coldest point in the appliance, due to the dew point.

If the temperature-humidity values fall below the specific limits (working range), the effective range is heavily dependent on the humidity content of the chamber load.

The higher the humidity content of the chamber load, the more steam is generated inside the chamber. This may influence the maintenance of the constant humidity. If you need constant stable operation at the edges or the chamber load is very humid, we recommend dehumidifying with compressed air. We also have other technical solutions for special needs that guarantee stable operation. Send us your inquiry!

To support you in choosing the right appliance, the Memmert TechLab MPTC is always available for tests under realistic conditions. Your customer service representative will gladly establish contact.